


Decorative Lumidisc™ 6752WH226U

Page 1 of 2

Ceiling or Wall Mounted Compact Fluorescent

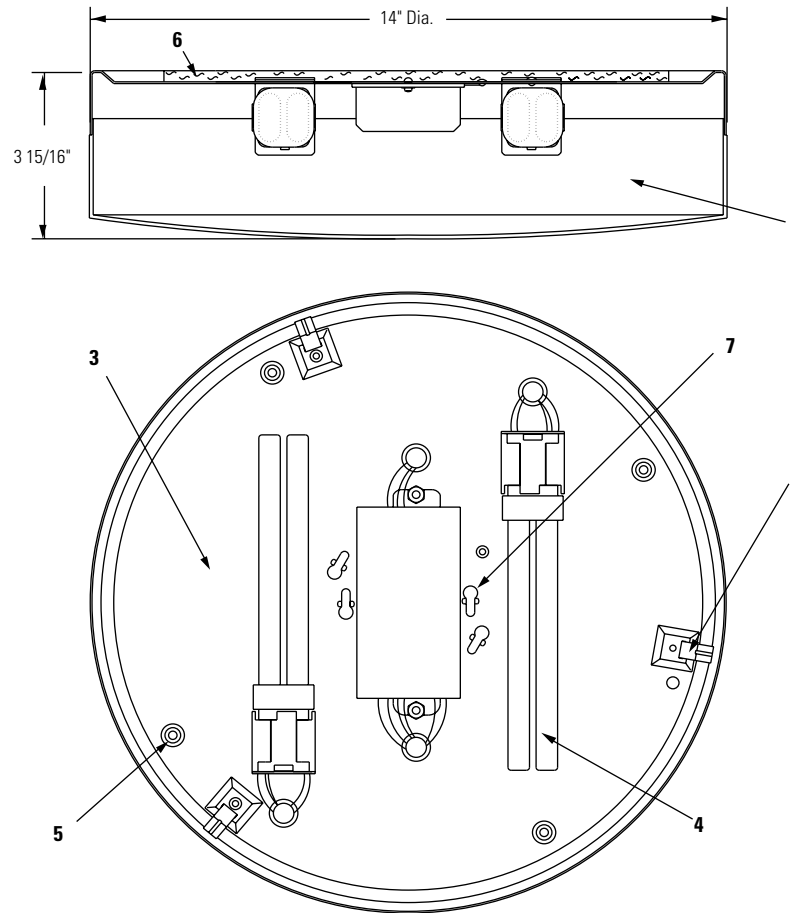

Ordering Information

Catalog Number	Diameter	Depth	Finish	Lamp
6752WH226U	14"	3 15/16"	Gloss White	(2) 26W Quad Tube 4-Pin

Features

- Diffuser:** Injection molded white translucent polycarbonate diffuser.
- Mounting:** Twist-lock fastening system.
- Ceiling Pan:** 20 ga. die formed aluminum.
- Lamps:** Compact Fluorescent (by others)
- Auxiliary Mounting Holes:** For direct mounting to ceiling surface.
- Insulation:** 1" thick fiberglass.
- Keyhole Mounting Slots:** (4) For direct mounting to 3: or 4" octagonal outlet boxes.

Labels

UL Listed, Suitable for Damp Locations.

Lamping

Compact Fluorescent: 26W Quad Tube 4-Pin

General Electric	Osram/Sylvania	Philips
F26 DBXT4/SPX*/4P	CF 26DD/E/*	PL-C26W/ */4P

*Manufacturers' color temperature designation.

Electrical

Lampholders:	Compact Fluorescent: 4-pin, G24q-3 base
Ballast:	Electronic 120/277V
Total Input Watts	53
Max. Line Current (Amps)	.46/.21
Power Factor	>.98
Ballast Factor	1.0
THD	< 10%
Min. Starting Temps.	-20°C (-4°F)

Job Information

Type:

Job Name:

Cat. No.:



Lamp(s):

Notes:


Lightolier a Genlyte Thomas Company
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

www.lightolier.com

LIGHTOLIER®

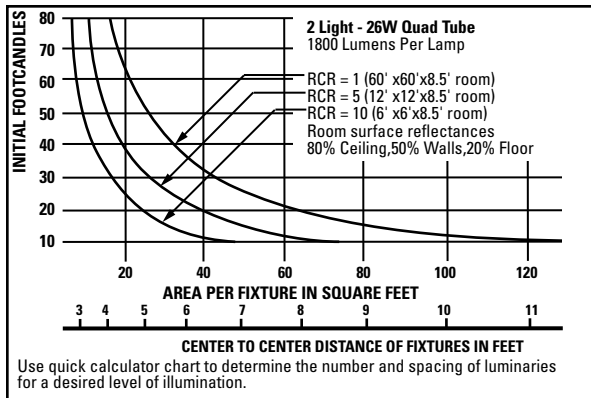

SPACING RATIO = 1.3

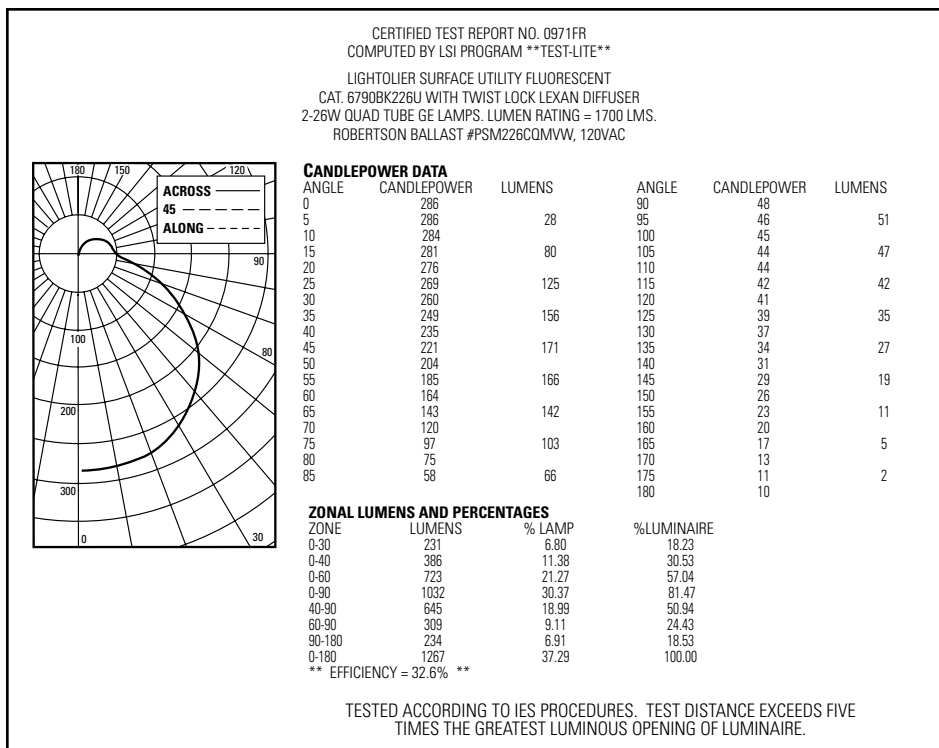

COEFFICIENTS OF UTILIZATION ZONAL CAVITY METHOD																	
%EFFECTIVE FLOOR CAVITY REFLECTANCE = .20																	
ROOM CAVITY RATIO	80			70			50			30			10			0	
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10		
	.37	.35	.33	.35	.34	.32	.32	.31	.30	.30	.29	.28	.27	.26	.26		.24
	.32	.29	.27	.30	.28	.26	.28	.26	.24	.26	.24	.23	.24	.23	.21		.20
	.28	.25	.22	.27	.24	.22	.25	.22	.20	.23	.21	.19	.21	.19	.18		.17
	.25	.21	.19	.24	.21	.18	.22	.19	.17	.20	.18	.16	.19	.17	.16		.14
	.22	.19	.16	.21	.18	.16	.19	.17	.15	.18	.16	.14	.17	.15	.13		.12
	.19	.16	.14	.19	.16	.13	.17	.15	.13	.16	.14	.12	.15	.13	.11		.11
	.17	.14	.12	.17	.14	.12	.16	.13	.11	.14	.12	.10	.13	.11	.10		.09
	.16	.13	.10	.15	.12	.10	.14	.11	.10	.13	.11	.09	.12	.10	.09		.08
.14	.11	.09	.14	.11	.09	.13	.10	.08	.12	.10	.08	.11	.09	.08	.07		
.13	.10	.08	.12	.10	.08	.12	.09	.07	.11	.09	.07	.10	.08	.07	.06		
DETERMINED IN ACCORDANCE WITH CURRENT IES PUBLISHED PROCEDURES																	

Job Information

Type:

Lightolier a Genlyte Thomas Company
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

www.lightolier.com

LIGHTOLIER®